


# Thermocouples

## Mineral Insulated Style AT With Thermowells

### Straight Well

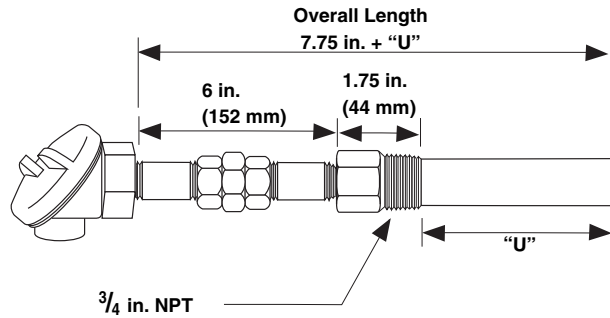


### Rapid Ship Sensors

Rapid Ship sensors come with 316 SS straight well, nipple-union-nipple, 0.250 inch diameter spring loaded element, small aluminum connection head and ungrounded junction.

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
J	2.5	(64)	10.25	261	ATJE1SF024UJ0Y0
	4.5	(114)	12.25	312	ATJE1SF044UJ0Y0
	7.5	(191)	15.25	388	ATJE1SF074UJ0Y0
	10.5	(267)	18.25	465	ATJE1SF104UJ0Y0
K	2.5	(64)	10.25	261	ATJE1SF024UK0Y0
	4.5	(114)	12.25	312	ATJE1SF044UK0Y0
	7.5	(191)	15.25	388	ATJE1SF074UK0Y0
	10.5	(267)	18.25	465	ATJE1SF104UK0Y0

### Tapered Well

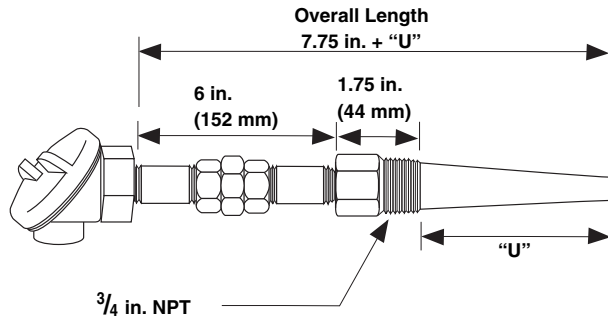

### Rapid Ship Sensors

Rapid Ship sensors come with 316 SS tapered well, nipple-union-nipple, 0.250 inch diameter spring loaded element, small aluminum connection head and ungrounded junction.

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
J	2.5	(64)	10.25	261	ATJE1TF024UJ0Y0
	4.5	(114)	12.25	312	ATJE1TF044UJ0Y0
	7.5	(191)	15.25	388	ATJE1TF074UJ0Y0
	10.5	(267)	18.25	465	ATJE1TF104UJ0Y0
K	2.5	(64)	10.25	261	ATJE1TF024UK0Y0
	4.5	(114)	12.25	312	ATJE1TF044UK0Y0
	7.5	(191)	15.25	388	ATJE1TF074UK0Y0
	10.5	(267)	18.25	465	ATJE1TF104UK0Y0